


# DOUBLE RING BARSTOOL ASSEMBLY INSTRUCTIONS

**Parts List**

- |   |                     |                                     |
|---|---------------------|-------------------------------------|
| 1 (2) allen wrenches                        | 5 (4) shims         | 9 (1) multi-ring base               |
| 2 (8) sleeved allen head screws             | 6 (2) barstool legs | 10 (1) inner support ring           |
| 3 (8) Nuts and bolts                        | 7 (1) swivel base   | 11 (1) outer support ring/foot rest |
| 4 (4) machine screws or self-tapping screws | 8 (1) barstool pad  |                                     |

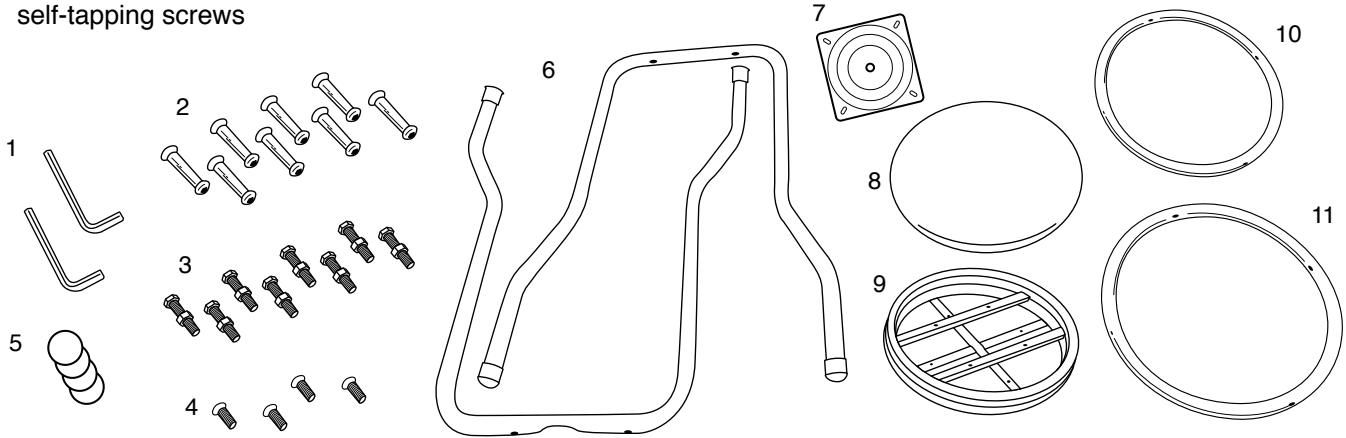

**Step 1:** Place the two legs together as shown in the image above.



**Step 2:** Slide the larger ring over the legs and align the holes. Slide the sleeved, allen head screw into the hole and an allen head screw through the other side and tighten down using the supplied allen wrenches. Repeat for the other holes. Slide the support ring inside the legs and repeat the steps for attaching the larger ring.



**Step 3:** Place the swivel plate on top of legs and align holes. Insert bolts and screw on nut securely.



**Step 4:** Place the seat base on top of the swivel plate. Align the holes and insert the bolts. Screw on nuts securely.



**Step 5:** Turn the barstool over and bolt the seat base to the pad as shown in the image above.



If the stool legs are uneven insert a shim between the foot pad and the barstool leg to level the barstool.

